

## Model AL30114P/AL40114P

Model AL30114P shown with standard Pontoon V-Racks.

Lift shown with optional Full-Length Guide-Ons and Motorstop which make entering lift and centering of your boat a pleasure.

Lift shown with Dubonnet Tweed SeaMark™ canopy.



## Model AL2096/AL20108

Lift shown with Full-Length V-Bunk.



## Model AL30108

Lift shown with Full-Length V-Bunk and vinyl centering guides.



## Model AL40108/AL40114

Model AL40108 shown with Full-Length V-Bunk, and optional Motorstop.



### CANTILEVER LIFT SPECIFICATIONS

	LIFT CAPACITY	BEAM WIDTH	LIFT LENGTH	LIFT WEIGHT
AL2096	2000 lbs.	96"	108"	275 lbs.
AL20108	2000 lbs.	108"	108"	289 lbs.
AL30108	3000 lbs.	108"	108"	354 lbs.
AL40108	4000 lbs.	108"	120"	402 lbs.
AL40114	4000 lbs.	114"	120"	408 lbs.


### CANTILEVER PONTOON LIFT SPECIFICATIONS

AL20108P	2000 lbs.	108"	108"	295 lbs.
AL30114P	3000 lbs.	114"	148"	394 lbs.
AL40114P	4000 lbs.	114"	148"	434 lbs.

## Elevated Standards and Workmanship

All Pier Pleasure cantilever lifts are standard with non-corrosive stainless bolts, stainless cable and brass nuts, giving you many years of service while maintaining a clean appearance.

Cantilever lifts work best in applications where there is very little water fluctuation. Cantilever lifts use only one cable and have fewer moving parts than vertical lifts. This keeps the cost of cantilever lifts lower than comparable vertical lifts.

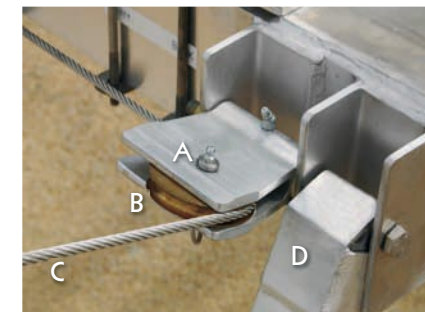

- A. Stainless pins with grease zerks
- B. Pulleys with brass sheaves
- C. Stainless steel cable
- D. Aluminum extruded cantilever end cap for maximum wear resistance



Pivoting footpad